

Beyond imagination

Experience unprecedented lightness.



EX TURBINE


Specification

No-load rotation speed 300,000 to 430,000 rpm Water pressure 0.07 to 0.20MPa
•Supply air pressure 0.17 to 0.29MPa *1
•Spray Four output
•Head Diameterφ11mm
Height12.7mm
Weight (Main body)30g
Total length (Main body) 106mm
Applicable bur TypeFG (Standard bur)
Shank length 11mm or more
Shank dia φ1.59 to 1.60mm
Bur insertion length11mm ^{⋆2}
Coupling EX QUICK COUPLING

*1 Air pressure should be properly set to keep the rotation speed within the specified range.

*2 Be sure to insert bur into the chuck as far as possible.

Material



Distributor

YOSHIDA


THE YOSHIDA DENTAL MFG.CO.,LTD. Address 1-3-6 Kotobashi, Sumida-ku Tokyo, Japan ZIP 130-8516





www.yoshida-net.co.jp/en

Third Edition

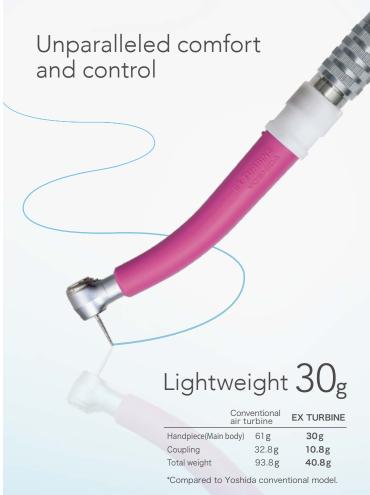

Uncompromised power

Design of powerful air turbine is EX TURBINE is no exception.



Practical advantages and solutions to accommodate doctor's needs.


Silicone body -

Help reduce the friction and vibration transmitted to the hand of the operator while improving the maneuverability thanks to the increased grip force.



Soft silicone also protects patients from pain and discomfort even when the body of the handpiece accidentally hits the opposing tooth during the treatment.





EX QUICK COUPLING

EX TURBINE can be used with various types of dental unit using the MIDWEST 4 hole coupling.







Two-tier spray system



Push button



Quick disconnect coupling





Simply pull up/down the coupling to connect and disconnect.

The effect of color!

Five cheerful colors are available to make positive differences.



More colors better management



Colors can be used to color code for better management.

After all, it's fun to be colorful.



Adding colors to your treatment space could help reduce patient's nervousness, especially for pediatric patients.